


VDT Series - Vantell Deck Tape / Roof Deck Tape

Durable butyl deck and roof deck sealing tape designed for protecting deck joists, roof deck seams, sheathing joints, and critical flashing details from water intrusion.

It provides strong adhesion to common building boards and metal substrates, helping improve long-term durability in outdoor deck and roofing applications.

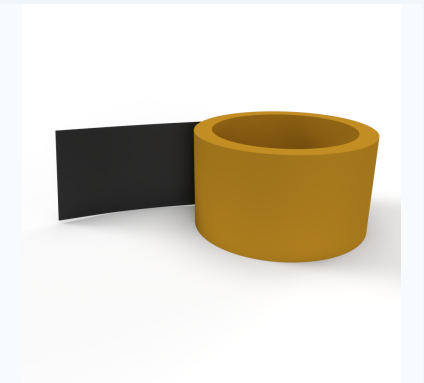

Model	Specification (Width x Length), m	Package (Roll/Ctn)
VDT-5015	0.05 x 15	24
VDT-5020	0.05 x 20	12
VDT-10015	0.10 x 15	12
VDT-10020	0.10 x 20	6

Technical Specifications			
Test Item	Standard / Method	Substrate / Condition	Test Result
Material	-	-	Butyl
Basis Weight	-	-	687 g/m²
Thickness	-	-	0.56 mm
180° Peel Adhesion	GB/T 2792-2014	Aluminum board; room temperature (28°C), 24 h	1.351 N/mm
180° Peel Adhesion	GB/T 2792-2014	Aluminum board; 80°C for 24 h, then test at room temperature	1.24 N/mm
180° Peel Adhesion	GB/T 2792-2014	Aluminum board; -40°C for 24 h, then test at room temperature	1.304 N/mm
180° Peel Adhesion	GB/T 2792-2014	OSB board; room temperature (28°C), 24 h	1.174 N/mm
180° Peel Adhesion	GB/T 2792-2014	OSB board; 80°C for 24 h, then test at room temperature	1.122 N/mm
180° Peel Adhesion	GB/T 2792-2014	OSB board; -40°C for 24 h, then test at room temperature	1.111 N/mm
180° Peel Adhesion	GB/T 2792-2014	MgO board; room temperature (28°C), 24 h	1.293 N/mm
180° Peel Adhesion	GB/T 2792-2014	MgO board; 80°C for 24 h, then test at room temperature	1.249 N/mm
180° Peel Adhesion	GB/T 2792-2014	MgO board; -40°C for 24 h, then test at room temperature	1.271 N/mm